Istruzioni assemblaggio nuovo Rail Lovato Gas
New Lovato Gas Rail Assembly instruction

Il nuovo rail iniezione prodotto da LOVATO viene fornito già assemblato senza ugelli ed è progettato per un rapido setup delle con-nessioni.
E' possibile modificare il layout semplicemen-te smontando gli anelli d'arresto dal corpo, cambiare le connessio-ni in base alle neces-sità e riposizionare gli anelli d'arresto nel corpo con una leggera spinta.

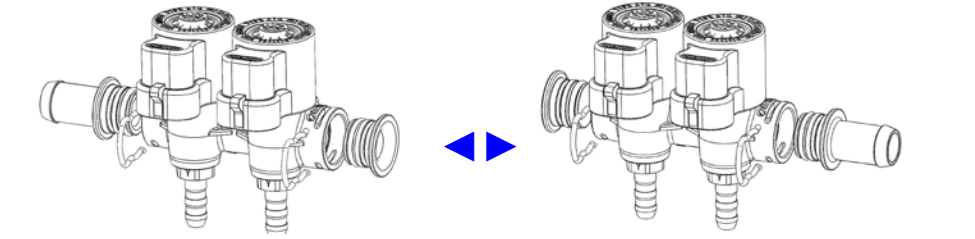

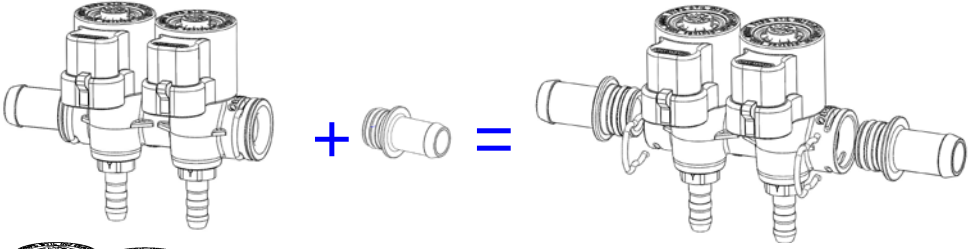

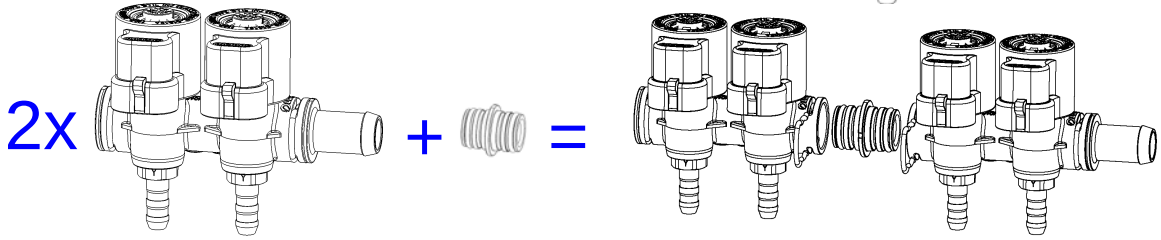

The new injection rail made by LOVATO is developed already assembled without nozzle and is designed for a quick connection setup.
You can modify the connection layout simply pull out the circle clip from the body, change the pipe/cap as you need and replace the circle clip by push on seat.

ATTENZIONE: Per rimuovere gli anelli d'arresto in modo corretto utilizzare un cacciavite a taglio e far leva al centro dell'anello stesso. Una volta terminate le operazioni di installazione verificare l'assenza di perdite su tutte le giunzioni dell'elettro-iniettore utilizzando un cercafughe e/o dell'acqua saponata.

WARNING: For a correct removing of the fixing ring use a screwdriver and lever in the center of the fixing ring itself. After the installation check the leakage on every junction of the electro-injector using a gas detector device and/or soapy water.

Lovato Gas S.p.A. – Strada Casale, 175 – 36100 Vicenza (Italia) – Tel. ++39-0444-218911 – Fax. ++39-0444-501540
email: info@lovatogas.com – http://www.lovatogas.com

190986440_1 del 04/02/13